


API flanged float ball valve

Q41F/Q341/Q641/Q941

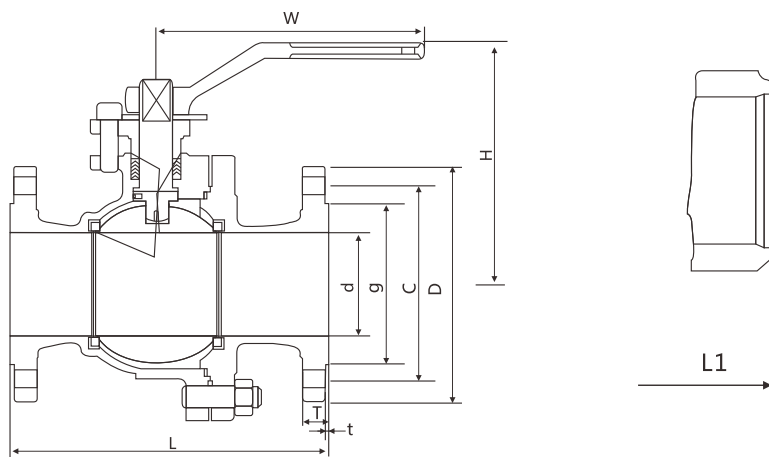

Main connection size

Nominal pressure	Size	Size (mm)									
	DN	d	L	D	C	g	T	t	H	W	n-Φ
class 150Lb	1/2"	15	108	89	60.5	35	12.7	1.6	87.5	142	4-15
	3/4"	20	117	98	70.0	43	12.7	1.6	87.5	142	4-15
	1"	25	127	108	79.5	51	13	1.6	91.5	142	4-15
	1 1/4"	32	140	117	89	64	14.5	1.6	107	190	4-15
	1 1/2"	40	165	127	98.5	73	15	1.6	128	200	4-15
	2"	50	178	152	120.5	92	16	1.6	136	200	4-19
	2 1/2"	65	190	178	139.5	105	18	1.6	158	300	4-19
	3"	80	203	190	152.5	127	19	1.6	196	350	4-19
	4"	100	229	229	190.5	157	24	1.6	212	700	4-19
	5"	125	356	254	215.9	186	24	1.6	252	1100	8-22
	6"	150	394	279	241.5	261	26	1.6	272	1100	8-22
	8"	200	457	343	298.5	270	29	1.6	342	1500	8-22
	10"	250	533	406	362	324	30	1.6	345	1500	12-25
	12"	305	610	483	432	381	32	1.6	385		12-25
	14"	337	686	535	476	413	35	1.6	430		12-29
16"	387	762	597	540	470	37	1.6	470		16-29	
18"	489	914	698	635	582	43	1.6	590		16-32	
class 300Lb	1/2"	15	140	95	66.5	35	15	1.6	87.5	142	4-15
	3/4"	20	152	117	82.5	43	16	1.6	87.5	142	4-15
	1"	25	165	124	89.0	51	18	1.6	91.5	142	4-19
	1 1/4"	32	178	133	98.5	64	19	1.6	107	190	4-19
	1 1/2"	40	190	156	114.5	73	21	1.6	128	200	4-22
	2"	50	216	165	127	92	23	1.6	136	200	8-19
	2 1/2"	65	241	190	149	105	26	1.6	158	300	8-22
	3"	80	283	210	168.5	127	29	1.6	202	350	8-22
	4"	100	305	254	200	157	32	1.6	218	700	8-22
	5"	125	381	279	235	186	35	1.6	252	1100	8-22
	6"	150	403	318	270	216	37	1.6	272	1100	12-22
	8"	200	502	381	330	270	41	1.6	342	1500	12-25
10"	250	568	444	387.5	324	48	1.6	345	1500	16-29	
class 600Lb	1/2"	15	165	95	66.5	35	15	6.4	59	160	4-16
	3/4"	20	190	117	82.5	43	16	6.4	63	160	4-19
	1"	25	216	124	89.0	51	18	6.4	75	230	4-19
	1 1/4"	32	229	133	98.5	64	21	6.4	85	300	4-19
	1 1/2"	40	241	156	114.5	73	22.3	6.4	95	400	4-22
	2"	50	292	165	127	92	25.4	6.4	107	700	8-19
	4"	100	432	273	216	157.2	38	6.4	178	1100	8-25
	5"	125	491	330	267	186	44.5	6.4	225	1100	8-29
6"	152	559	356	282	216	47.2	6.4	250	1500	12-29	
8"	203	660	419	349	282	55.7	6.4	294	1500	12-32	