


# Bs4504 standard flange

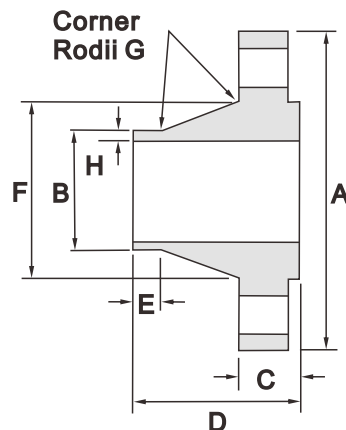

DN	PN	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm
10	2.5,6	75		12	28		26		1.8
	10	90		14	35		28		1.8
	16	90	17.2	14	35	6	28	3	1.8
	25	90		16	35		28		1.8
	40	90		16	35		28		1.8
15	2.5,6	80		12	30		30		2
	10	95		14	35		32		2
	16	95	21.3	14	35	6	32	3	2
	25	95		16	38		32		2
	40	95		16	38		32		2
20	2.5,6	90		14	32		38		2.3
	10	105		16	38		39		2.3
	16	105	26.9	16	38	6	39	4	2.3
	25	105		18	40		40		2.3
	40	105		18	40		40		2.3
25	2.5,6	100		14	35		42		2.6
	10	115		16	38		46		2.6
	16	115	33.7	16	38	6	46	4	2.6
	25	115		18	40		46		2.6
	40	115		18	40		46		2.6
32	2.5,6	120		14	35		55		2.6
	10	140		16	40		56		2.6
	16	140	42.4	16	40	6	56	5	2.6
	25	140		18	42		56		2.6
	40	140		18	42		56		2.6
40	2.5,6	130		14	38		62		2.6
	10	150		16	42		64		2.6
	16	150	48.3	16	42	7	64	5	2.6
	25	150		18	45		64		2.6
	40	150		18	45		64		2.6
50	2.5,6	140		14	38		74		2.9
	10	165		18	45		74		2.9
	16	165	60.3	18	45	8	74	5	2.9
	25	165		20	48		74		2.9
	40	165		20	48		74		2.9
65	2.5,6	160		14	38	9	88		2.9
	10	185		18	45		92		2.9
	16	185	76.1	18	45	10	92	6	2.9
	25	185		22	52		92		2.9
	40	185		22	52		92		2.9
80	2.5,6	190		16	42		102		3.2
	10	200		20	50	10	110		3.2
	16	200	88.9	20	50		110	6	3.2
	25	200		24	58		110		3.2
	40	200		24	58	12	110		3.2

DN	PN	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm
100	2.5,6	210		16	45	10	130		3.6
	10	220		20	52		130		3.6
	16	220	114.3	20	52	12	130	6	3.6
	25	235		24	65		134		3.6
	40	235		24	65		134		3.6
125	2.5,6	240		18	48	10	155		4
	10	250		22	55		158		4
	16	250	139.7	22	55	12	158	6	4
	25	270		26	68		162		4
	40	270		26	68		162		4
150	2.5,6	265		18	48		184		4.5
	10	285		22	55		184		4.5
	16	285	168.3	22	55	12	184	8	4.5
	25	300		28	75		190		4.5
	40	300		28	75		190		4.5
200	2.5,6	320		20	55	15	236		5.6
	10	340		24	62		234		5.6
	16	340	219.1	24	62	16	234	8	5.6
	25	360		30	80		244		6.3
	40	375		34	88		244		6.3
250	2.5,6	375		22	60	15	290		6.3
	10	395		26	68		288		6.3
	16	405	273	26	70	16	288	10	6.3
	25	425		32	88		296		7.1
	40	450		38	105	18	306		7.1
300	2.5,6	440		22	62	15	342		7.1
	10	445		26	68		342		7.1
	16	460	323.9	28	78	16	342	10	7.1
	25	485		34	92		350		8
	40	515		42	115	18	362		8
350	2.5,6	490		22	62	15	385		7.1
	10	505		26	68		390		7.1
	16	520	355.6	30	82	16	390	10	8
	25	555		38	100	20	398		8
	40	580		46	125		408		8.8
400	2.5,6	540		22	65	15	438		7.1
	10	565		26	72		440		7.1
	16	585	406.4	32	85	16	444	10	8
	25	620		40	110	20	452		8.8
	40	660		50	135		462		11
450	2.5,6	595		24	65	15	492		7.1
	10	615		28	72		488		7.1
	16	640	457	34	87	16	490	12	8
	25	670		42	110	20	500		8.8
	40	685		50	135		500		12.5